


UNIC

UR-A100 series

1.8t-m 1,015kg at 1.8m capacity

Light-duty cargo-deck-mounted UNIC Crane

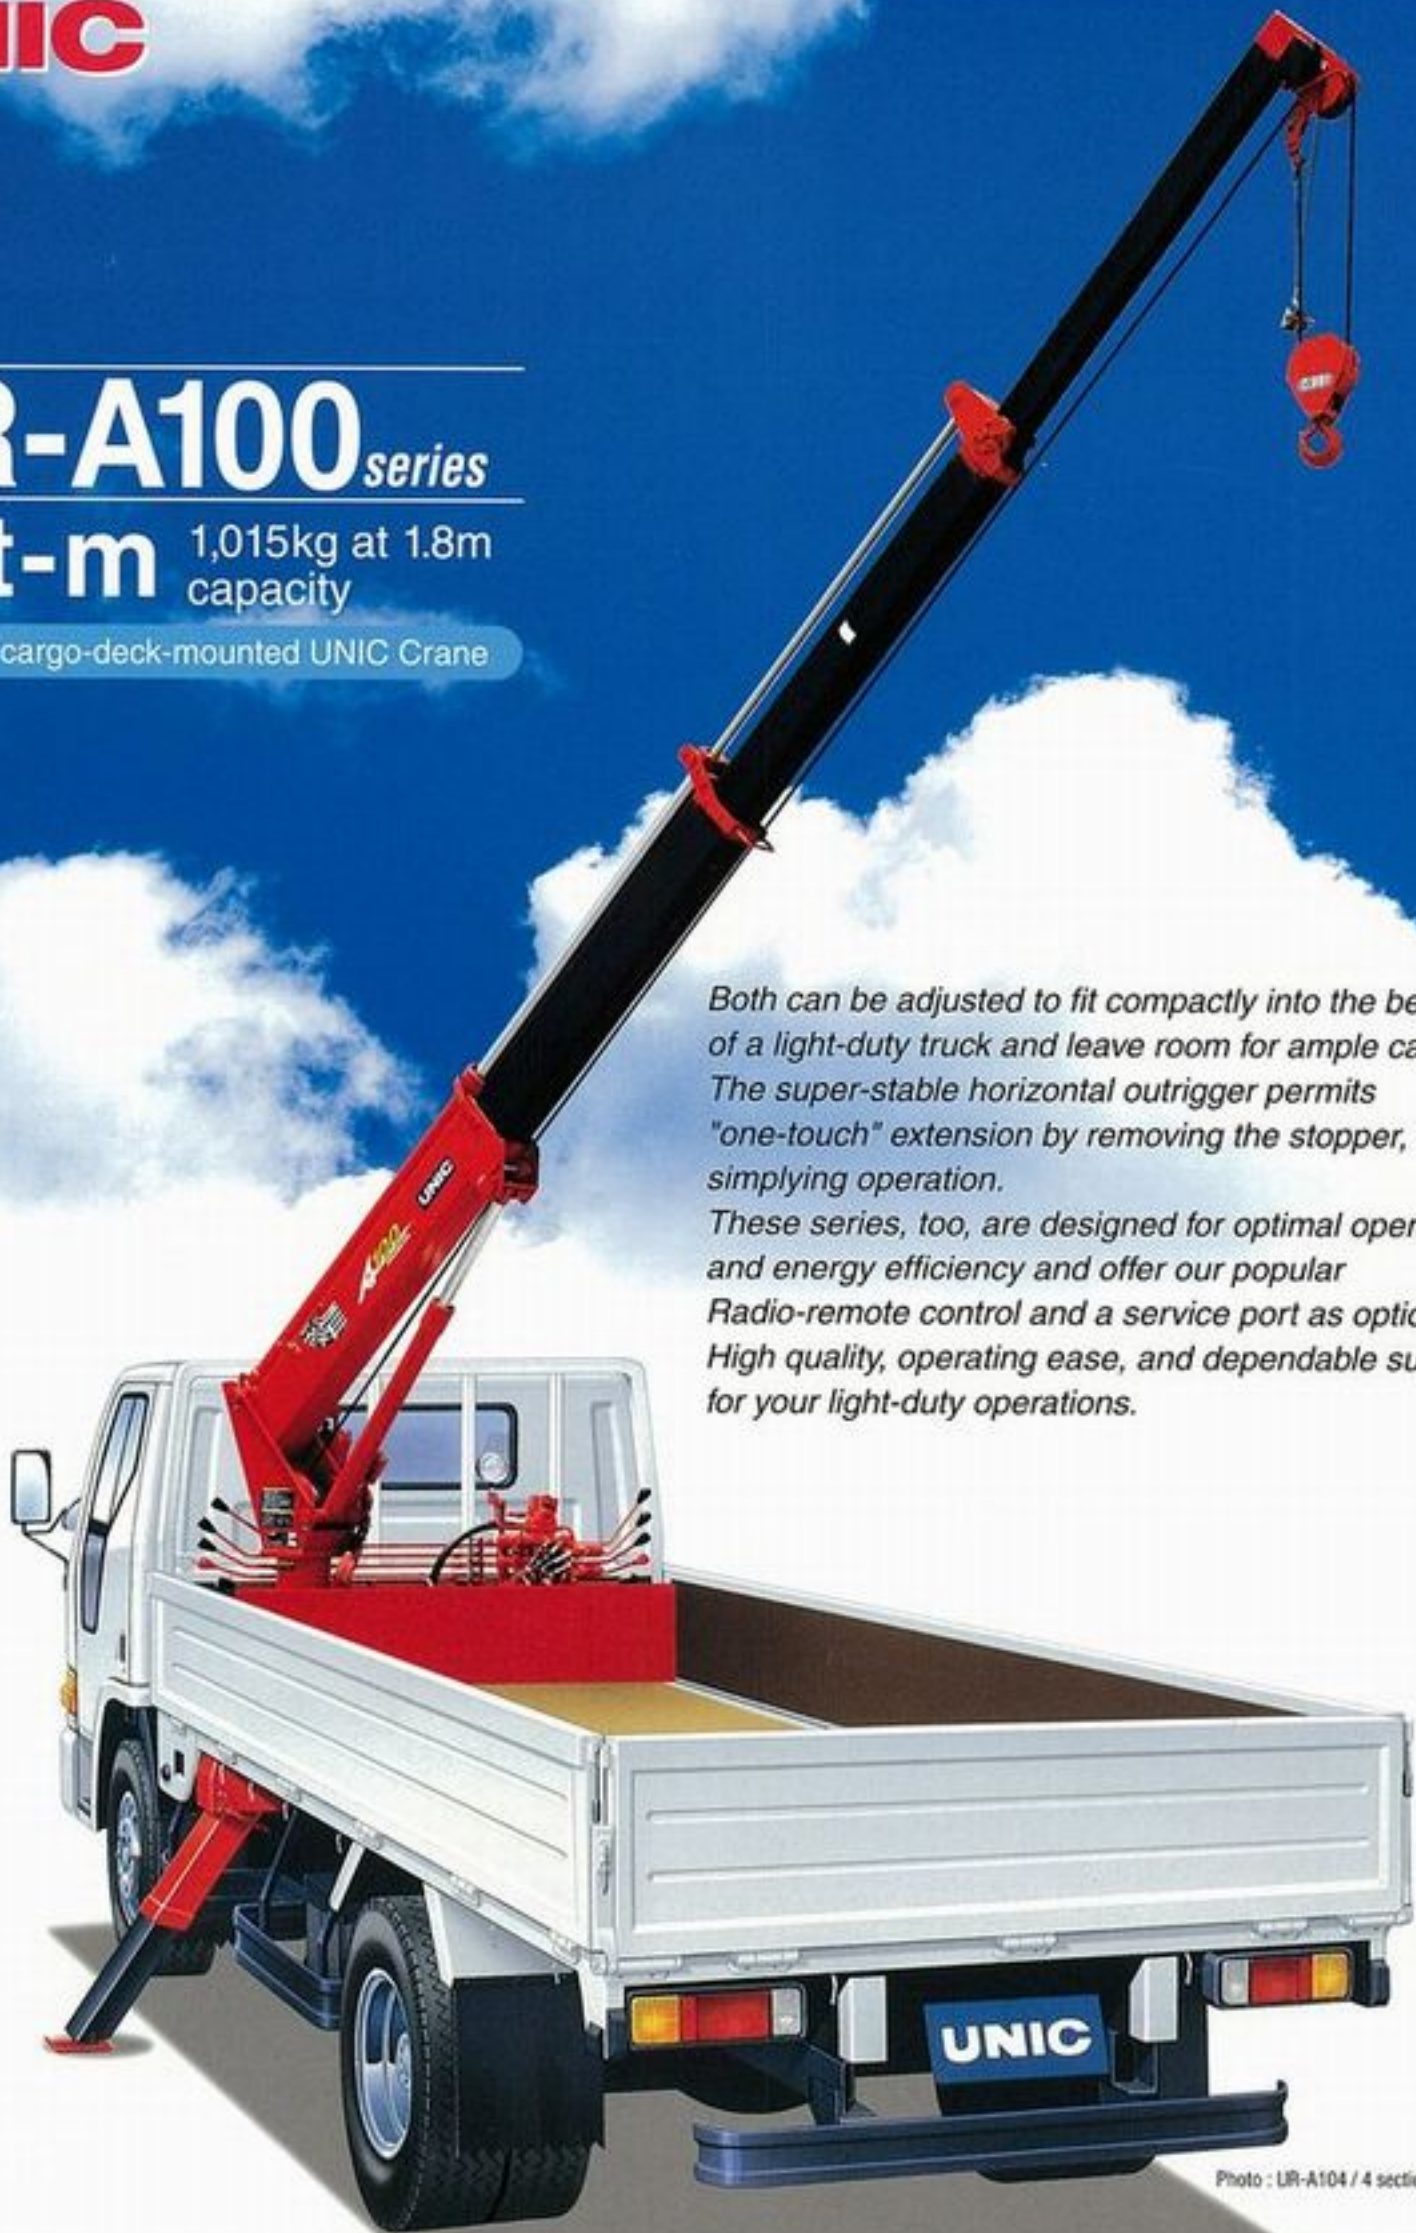


Both can be adjusted to fit compactly into the bed of a light-duty truck and leave room for ample cargo. The super-stable horizontal outrigger permits "one-touch" extension by removing the stopper, simplifying operation.

These series, too, are designed for optimal operating and energy efficiency and offer our popular Radio-remote control and a service port as options. High quality, operating ease, and dependable support for your light-duty operations.

Photo : UR-A104 / 4 section boom

FURUKAWA UNIC CORPORATION



Automatic Accelerator (A.A.) lever

The crane operation lever controls the accelerator. By simply engaging the A.A. lever the operator can control speed without using the accelerator lever. One-handed operation is easy for everything from very slow-speed idling to full-throttle high-speed operations.




Radio remote control option

This permits the operator to have on-the-spot hand control of lifting operations by remote control via radio waves at a safe distance. It ensures safe, accurate one-man operation — with energy savings.


Outrigger automatic extension device

The left-side outrigger is easily controlled by a lever that lets you jack it up vertically and extend it horizontally. The outrigger cylinder mechanism is protected from damage by a tenaciously strong cast-iron sheath or "box". (The right-side outrigger can be automatically jacked up and down.)

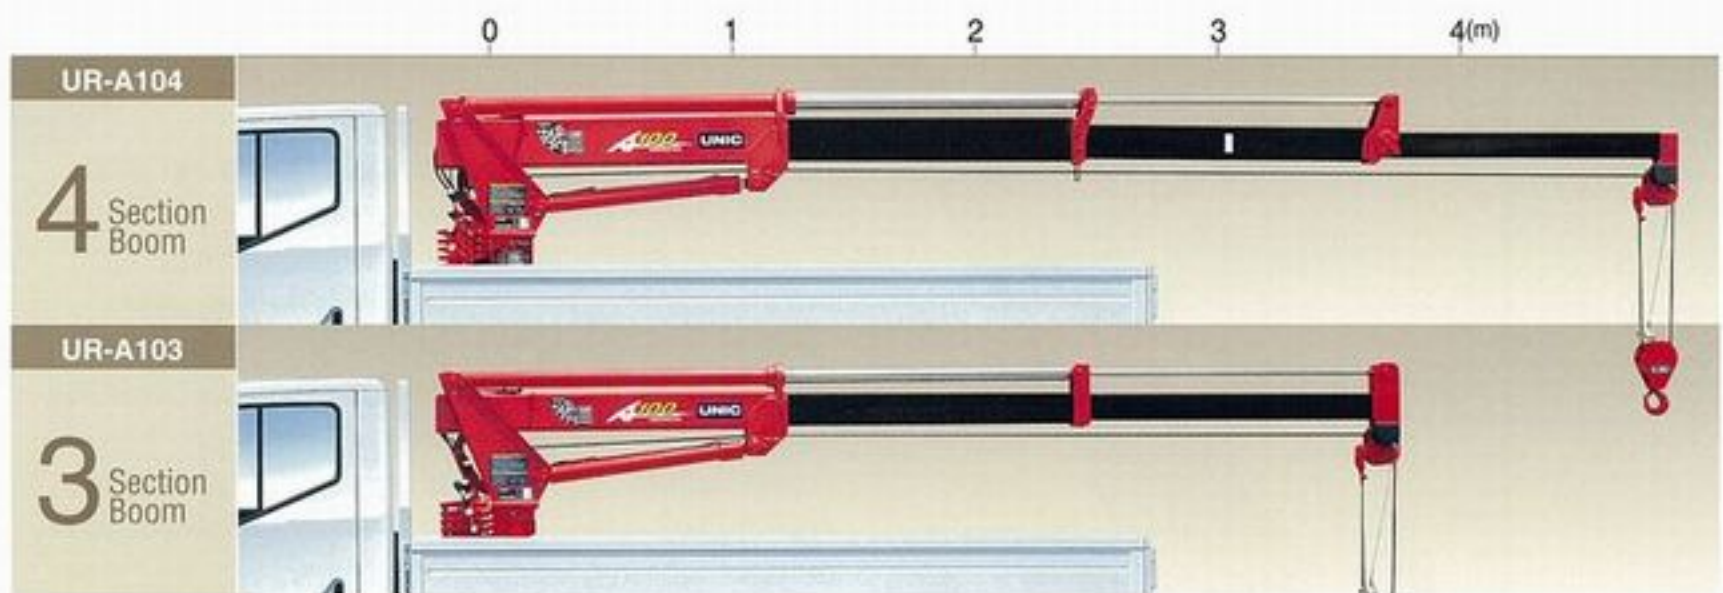

UR-A100 Series Specifications Table

	UR-A104	UR-A103
Capacity	1,000 kg at 1.8 m 2,200 lbs at 5.91 ft	1,000 kg at 1.8 m 2,200 lbs at 5.91 ft
Working radius	Min. 0.48 m to Max. 4.83 m Min. 1.57 ft to Max. 15.85 ft	Min. 0.44 m to Max. 3.64 m Min. 1.44 ft to Max. 11.94 ft
Hook height above ground level (approx)	Max. 5.97 m Max. 19.59 ft	Max. 4.82 m Max. 15.81 ft
Boom length	Min. 1.505 m to Max. 5.075 m Min. 4.94 ft to Max. 16.65 ft	Min. 1.505 m to Max. 3.885 m Min. 4.94 ft to Max. 12.75 ft
Boom section	4	3
Boom raising range	Min. 0° to Max. 75°	Min. 0° to Max. 75°
Slewing range	200°	200°



In accordance with our policy of constant product improvement, all specifications are subject to change without notice or obligations.

Distributed by
madani utama
 Crane car rental & service
www.mobilcrane.co.id

FURUKAWA UNIC CORPORATION

Head Office: Center Bldg., 3-12, Higashishinagawa 2-chome, Shinagawa-ku, TOKYO 140-0002 JAPAN
 Phone: (81-3) 5460-4154 / Facsimile: (81-3) 5460-4191